


REDeye Inverted V Infrared Reflective Vehicle Decals

Manufactured in the UK by an ISO 9001 certificated NATO approved supplier

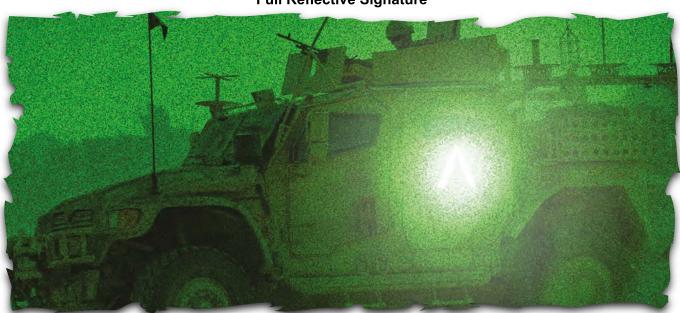

Full Reflective Signature

IR Night Vision Image

REDeye¬ products transmit a high intensity infrared reflective signature with an IR transmission value of >70% at 835nm. Using an IR capable PVS-14 night vision device items in the REDeye¬ product range can be identified at over 800 m etres. EXIUM combat identity products are customised to meet the specific construction, infrared performance and visual signature requirements of our military, security and police clients worldwide.

Product Range Includes:

Uniform Patches and Insignia Dual ID Products Helmet Schims Antenna Markers Self Adhesive Vehicle V's Adjustable Neoprene Armbands Double Sided Hanging IR Reflectors Blood Group Patches

BETALIGHT B.V.
T 0031 341 360111
F 0031 341 361238
E info@betalight.nl
I www.betalight.nl






The REDeye® 100 System

The products within the REDeye® 100 combat ID range have full colour surface detail that accurately replicates any national flag or service insignia. Depending on the optical patterning technique used, a full 100% infrared reflective signature can be achieved. This technique enables the reproduction of vehicle camouflage colour schemes so the infrared vehicle markers appear more subdued in daylight conditions.

Full Colour Inverted V




Daylight Image

Full Reflective Signature



IR Night Vision Image

Manufactured by an ISO 9001 certificated UK company. The EXIUM infrared reflective "UpArrow" inverted V marker uses a superior metallised prismatic retro-reflective base material. This produces a high grade infrared reflective signature with a IR transmission value of >70% at 835nm, viewable over 800m using a PVS-14 night vision device. UpArrow markers have a matt diffuse pattern finish on a clear abrasion resistant coating giving superior performance and durability in aggressive operational environments.



Product Reference Code

AAV12 - 305 mm (12") AAV14 - 355 mm (14") AAV21 - 535 mm (21") AAV28 - 715 mm (28")